

# ICOM

Pre-release Information


WIDEBAND RECEIVER

# IC-RX7

## Slim and Smart Wideband Receiver


### New User Interface

The IC-RX7 has a menu driven user interface that allows intuitive user-friendly operation. The 4-way cursor buttons provide quick navigation to menus and settings.



### Independent Scan Button

The IC-RX7 will come with preset memory channels for ham radio, air band, railroads, car racing, and more. Select your desired listening subject and, with the push of the "Scan" button, the IC-RX7 will automatically find active channels within that area of interest.




### Independent Search Button

The channel mode and channel step are preprogrammed for each frequency range. Easily search new active channels within a designated frequency range or fixed category with a push of the "Search" button. The auto memory write function automatically stores detected channels in your memory.



### 3-level Memory Management

A total of 1650 memory channels can be classified 3 different ways: by "Category" (up to 26 categories), by "Group" (up to 100), and by "Memory Name" (up to 100). An alphanumeric name of up to 16 characters may be used for each channel, and up to 6 channels can be stored per "Memory Name" heading. In addition, each "Category" can be labeled with an icon, for faster recognition.

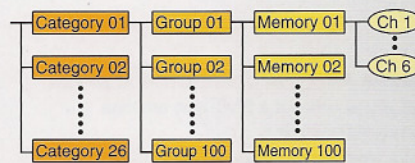

### Computer Programmable

With the optional CS-RX7 software, the programming and cloning of the IC-RX7 is a breeze. Connect the IC-RX7 to your PC and you can update or customize channel names, scan lists and more.

### Slim and Stylish Design

Modern consumer device design distinguishes the IC-RX7 from other scanner products. The IC-RX7 has only 23 mm slim depth\*<sup>1</sup> and weighs just 200g.\*<sup>2</sup>

\*<sup>1</sup> 29/32 in; Projections are not included. \*<sup>2</sup> 7.1oz (approx) with BP-244 and antenna.



## Other features

- 150kHz–1300MHz\* wide frequency coverage  
(\* Cellular blocked in the USA version)
- Large, backlit full dot-matrix display
- High speed scan and high speed search (100ch/sec.)
- Rain resistance equivalent to IPX4
- Basic search function allows you to search common preset bands
- CTCSS/DTCS decode
- VSC (Voice Squelch Control)
- Built-in RF-gain control and attenuator
- Built-in AM bar antenna
- Earphone antenna function for FM broadcast RX
- 3.7V/1100mAh Li-Ion battery pack supplied
- Auto power save
- DC power jack for external DC operation

## SPECIFICATIONS

## GENERAL

• Frequency coverage	: 0.150–1300.000MHz* (* Cellular blocked in the U.S.A. version.)
• Mode	: AM, FM, WFM
• No. of memory channels	: 1650 (1400 regular, 50 scan edges and 200 automatic write memory)
• Usable temperature range	: –10°C to +60°C ; +14°F to +140°F
• Frequency stability	: ±6ppm (–10°C to +60°C)
• Tuning steps	: 5, 6.25, 7.5, 8.33*, 9*, 10, 12.5, 15, 20, 25, 30, 50, 100, 125 and 200kHz (* Selectable depending on operating bands.)
• Battery requirement	: 3.7V DC (with BP-244) 4.5V DC (3×AA (LR6) cells with BP-262)
• External power supply	: 6.0V DC ±5% (with BC-149A/D, CP-18A/E)
• Current drain (at 3.7V DC)	: Rated audio 150mA typ. Standby 100mA typ. Power save 35mA typ.
• Antenna impedance	: 50Ω (SMA)
• Dimensions (W×H×D) (projections not included)	: 57×128×23 mm; 2 1/4×3 1/2×2 9/32 in
• Weight (approx.)	: 200g; 7.1oz (With BP-244 and antenna)

The specifications described above are target values. They are subject to change without notice.

## RECEIVER

• Intermediate frequencies	: 429.1MHz, 19.65MHz, 450kHz
• Sensitivity (except spurious points):	
FM	1.625– 4.995MHz Less than 0.56μV
(12dB SINAD)	5.000– 246.995MHz Less than 0.4μV
	247.000– 832.995MHz Less than 0.56μV
	833.000– 1300.000MHz* Less than 0.79μV
(* USA version)	851.000– 866.995MHz Less than 1.26μV
	896.000– 1300.000MHz Less than 0.79μV
WFM	76.000– 108.000MHz Less than 1.78μV
(12dB SINAD)	175.000– 221.995MHz Less than 1.78μV
	470.000– 770.000MHz Less than 2.5μV
AM	0.495– 4.995MHz Less than 2.5μV
(10dB S/N)	5.000– 29.995MHz Less than 1.78μV
	118.000– 136.000MHz Less than 1.78μV
	222.000– 246.995MHz Less than 1.78μV
	247.000– 329.995MHz Less than 1.78μV
• Selectivity AM, FM	: More than 12kHz/–6dB Less than 30kHz/–60dB
WFM	: More than 150kHz/–6dB
• AF output power (at 3.7V DC)	: 75mW typ. at 10% distortion with an 8Ω load
• External SP connector	: 3-conductor 3.5 (d) mm (1/8") /8Ω

## OPTIONS

- **BP-244** Li-Ion BATTERY PACK  
3.7V/1100mAh Lithium Ion battery pack.
- **BP-262** BATTERY CASE  
Battery case for AA (LR6)×3 alkaline cells.
- **BC-149A/D** WALL CHARGER  
6V DC, 1A output AC adapter. Same as supplied.
- **CP-18A/E** CIGARETTE LIGHTER CABLE  
6V DC, 2A output from 12V cigarette lighter socket.
- **AD-92SMA** ANTENNA CONNECTOR ADAPTER  
Allows you to connect a BNC-type antenna.
- **MB-112G** BELT CLIP  
Alligator type. Same as supplied.
- **HP-4** HEADPHONE  
Light weight monaural headphone.
- **LC-170** CARRYING CASE  
Helps protect the receiver from scratches, etc.
- **SP-13** EARPHONE  
Provides clear audio even in noisy environments.
- **CS-RX7** CLONING SOFTWARE  
Use a PC to easily edit stored memory channel data. OPC-478UC, USB cable is included.
- **OPC-474** CLONING CABLE  
Used for receiver-to-receiver data cloning.
- **OPC-478/UC** CLONING CABLE  
OPC-478: RS-232C type. OPC-478UC: USB type.

This device has not been approved by the appropriate authorities in each country. This device may not be sold or leased, or be offered for sale or lease, until approval has been obtained. All stated features, appearances, screen shots and specifications may be subject to change without notice. Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

## Icom America Inc.

2380 116th Avenue NE,  
Bellevue, WA 98004, U.S.A.  
Phone: +1 (425) 454-8155  
Fax: +1 (425) 454-1509  
E-mail: [sales@icomamerica.com](mailto:sales@icomamerica.com)  
URL: <http://www.icomamerica.com>

## Icom Canada

Greenwood Centre #150-6165 Highway 17,  
Delta, B.C., V4K 5B8, Canada  
Phone: +1 (604) 952-4266  
Fax: +1 (604) 952-0090  
E-mail: [info@icomcanada.com](mailto:info@icomcanada.com)  
URL: <http://www.icomcanada.com>

## Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,  
Clayton, VIC 3168 Australia  
Phone: +61 (03) 9549 7500  
Fax: +61 (03) 9549 7505  
E-mail: [sales@icom.net.au](mailto:sales@icom.net.au)  
URL: <http://www.icom.net.au>

## Icom New Zealand

146A Harris Road, East Tamaki,  
Auckland, New Zealand  
Phone: +64 (09) 274 4062  
Fax: +64 (09) 274 4708  
E-mail: [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz)  
URL: <http://www.icom.co.nz>

## Icom (Europe) GmbH

Communication Equipment  
Himmelgeister Str. 100,  
D-40225 Düsseldorf, Germany  
Phone: +49 (0211) 346047  
Fax: +49 (0211) 333639  
E-mail: [info@icom-europe.com](mailto:info@icom-europe.com)  
URL: <http://www.icomeurope.com>

## Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"  
Bajos A 08174, Sant Cugat del Valles,  
Barcelona, Spain  
Phone: +34 (93) 590 26 70  
Fax: +34 (93) 589 04 46  
E-mail: [icom@icomspain.com](mailto:icom@icomspain.com)  
URL: <http://www.icomspain.com>

## Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay,  
Kent, CT6 8LD, U.K.  
Phone: +44 (01227) 741741  
Fax: +44 (01227) 741742  
E-mail: [info@icomuk.co.uk](mailto:info@icomuk.co.uk)  
URL: <http://www.icomuk.co.uk>

## Icom France s.a.s.

Zac de la Plaine,  
1 Rue Brindejonn des Moulains, BP 45804,  
31505 Toulouse Cedex 5, France  
Phone: +33 (5) 61 36 03 03  
Fax: +33 (5) 61 36 03 00  
E-mail: [icom@icom-france.com](mailto:icom@icom-france.com)  
URL: <http://www.icom-france.com>

## Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland  
Phone: +48 (58) 550 7135  
Fax: +48 (58) 551 0484  
E-mail: [icompolksa@icompolksa.com.pl](mailto:icompolksa@icompolksa.com.pl)  
URL: <http://www.icompolksa.com.pl>

## Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone: +886 (02) 2559 1899  
Fax: +886 (02) 2559 1874  
E-mail: [sales@asia-icom.com](mailto:sales@asia-icom.com)  
URL: <http://www.asia-icom.com>

## Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding  
Road, Haidian District, Beijing, 100039, China  
Phone: +86 (010) 5889 5391/5392/5393  
Fax: +86 (010) 5889 5395  
E-mail: [bjicom@bjicom.com](mailto:bjicom@bjicom.com)  
URL: <http://www.bjicom.com>

Your local distributor/dealer:

ZASTOUPENÍ PRO ČR:  
HCS komunikační systémy s.r.o.  
Na Šabatce 4, 143 00 Praha 4  
tel. 777 144 300  
[www.icomcz.com](http://www.icomcz.com) [www.hcsradio.cz](http://www.hcsradio.cz)  
[mail@hcsradio.cz](mailto:mail@hcsradio.cz)